



5HP Custom Heat Pump Direct Heating Heat Pump Galvanized Sheet Material

Basic Information

Place of Origin: China
Brand Name: Meidibao
Certification: CE

Model Number: KFYRS-18II-M1

• Minimum Order Quantity: 3units

Price: negotiate a price Packaging Details: Factory standards

Delivery Time: Specific to the order based on regular

products 5 to 7 days. Custom made for 30

days

• Payment Terms: T/T

Supply Ability: 20 units one day



Product Specification

Material: Galvanized Sheet

• Heat Exchanger: Shell In Coil Or Tube In Tube

Waterproof Level: IP×4
 Working Ambient Temperature: 0~43C

Advantage: Direct Heating
 Power Supply: 380V 3N /50Hz
 Name: Custom Heat Pump

Highlight: 5HP Custom Heat Pump,
 Custom Heat Pump Direct Heating

Product Description

5HP Custom heat pump Direct heating heat pump for customers who want direct heating

Product Description:

Meidibao air source heat pump system is powered by ambient air and operates around the clock: it provides continuous hot water thrughout the yeat and throughout the year,regardless of weather. The opreating cost is 67% less than that of gas water heater, 75% less than that of electric water heater and 60% less than that of boiler. Intelligent control: The unit is automatically controlled by a microcomputer, and automatically runs according to the water temperature of the water tank and the user's water use, without the need for special duty. Reasonable arrangement of low front

Feature


- 1. Fast heating: Allows for quick attainment of the desired water temperature.
- 2. Stable performance: Ensures a consistent supply of heated water without significant fluctuations.
- 3. Easy to install and maintain: Has a straightforward installation procedure and requires relatively simple maintenance.
- 4. Versatile application: Can be used in different settings such as residential, commercial, or industrial areas for heating purposes.

Specification:

Openioalien:		
	20KW Direct heating heat pump	
Model:		KFYRS-18II-M1
Power supply:		380V 3N /50Hz
Rated heating capacity:	kw	20
Rated power input:	kw	5
Rated current:	A	8.83
Max. power input:	kw	6.5
Max. current input:	A	11.48
Water heating capacity:	L/h	429
Refrigerant/charging volume:		R410a/2600g
Max. exhaust pressure:	MPa	3.0MPa
Min. suction pressure:	MPa	0.05MPa
Rated hot water temp.:		55
Max. hot water temp.:		60
Water pipe size:		DN25
Noise level:	dB(A)	≤65dB(A)
Anti-electric shock rate		I
Protection grade:		IP×4
Dimensions:	mm	750×690×1060
Net weight:	kg	150kg

Advantages:

Heat pump form heating: no need to build a boiler room, directly from the air heat absorption, reduce the cost, clean and safety, avoid environmental pollution; For some winter by heat pump heat shortage places, it can also choose auxiliary electric heating to meet the heat requirements. High efficiency, energy saving, reliable performance: choose the world famous brand rotary type or fully enclosed vortex compressor and the world famous brand high-quality refrigeration components, to ensure that the whole machine plays the highest energy efficiency. The multi-system unit adopts a two-stage energy regulation system, which is especially suitable for partial load, more energy saving and can effectively protect the frequent start of the system.

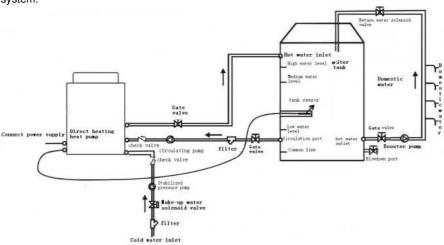





No9, Guangming North Road, Jiangyi, Leliu Town, Shunde District, Foshan City Guangdong Province, China