



Heat Pump Air Source Customized Air Water Heat Pump Heat Pump Water Heater

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Meidibao
- Certification: CE
- Model Number: KFYRS-18II-M1
- Minimum Order Quantity: 3units
- Price: negotiate a price
- Packaging Details: Factory standards
- Delivery Time: Specific to the order based on regular products 5 to 7 days. Custom made for 30 days
- Payment Terms: T/T
- Supply Ability: 20 units one day



Product Specification

- Name: Air Source Heat Pump
- Material: Galvanized Sheet
- Waterproof Level: IP×4
- Working Ambient Temperature: 0~43C
- Heat Exchanger: Shell In Coil Or Tube In Tube
- Heating Capacity: 20KW
- Highlight: Customized Air Water Heat Pump, 20KW Capacity Heat Pump Water Heater, Air Source Heat Pump



for more products please visit us on airsource-heatingpump.com

Product Description

Heat Pump air Source OEM Customized Air Water Heat Pump Heat Pump Water Heater

Product Description:

The **OEM Customized Air Source Heat Pump** is designed to provide **efficient heating and hot water solutions** for residential, commercial, and industrial applications. Utilizing **air-to-water heat pump technology**, this system extracts heat from the air to deliver **eco-friendly, cost-effective heating and hot water**, reducing energy consumption by up to **75% compared to traditional electric water heaters**.

With **OEM customization options**, businesses can tailor the design, branding, and technical specifications to meet market demands and specific customer requirements.

Feature:


1. OEM & Customization Options
2. High Energy Efficiency
3. Air-to-Water Heating Technology
4. Eco-Friendly Refrigerant (R32/R410A)
5. Durable & Corrosion-Resistant Build
6. Low Noise & Stable Performance

Specification:

20KW Direct heating heat pump		
Model:		KFYRS-18II-M1
Power supply:		380V 3N /50Hz
Rated heating capacity:	kw	20
Rated power input:	kw	5
Rated current:	A	8.83
Max. power input:	kw	6.5
Max. current input:	A	11.48
Water heating capacity:	L/h	429
Refrigerant/charging volume:		R410a/2600g
Max. exhaust pressure:	MPa	3.0MPa
Min. suction pressure:	MPa	0.05MPa
Rated hot water temp.:		55
Max. hot water temp.:		60
Water pipe size:		DN25
Noise level:	dB(A)	≤65dB(A)
Anti-electric shock rate		I
Protection grade:		IP×4
Dimensions:	mm	750×690×1060
Net weight:	kg	150kg

Ideal Applications

Residential Homes & Apartments
Hotels & Resorts
Factories & Industrial Facilities
Office Buildings & Commercial Properties
Swimming Pools & Spas
Schools & Healthcare Centers

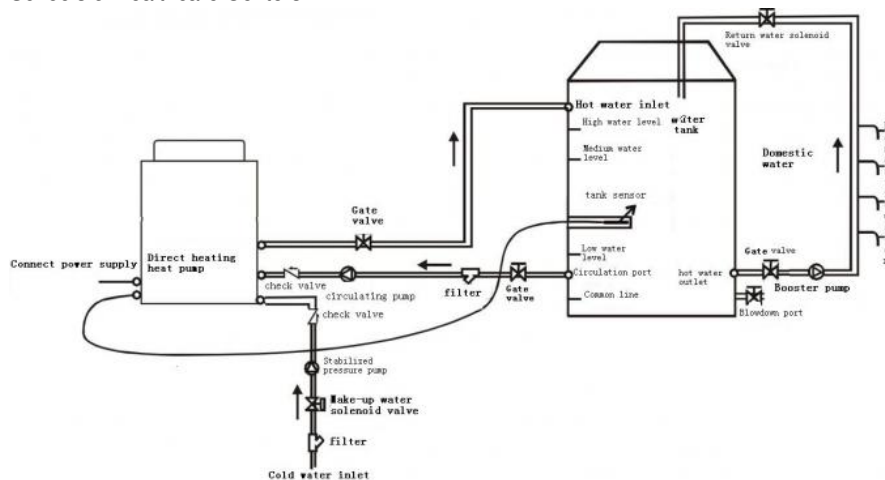



Meidibao® Foshan Meidi Bao Electric Appliance Industry Co., Ltd

☎ 8613534489875

✉ info@meidibao.com

🌐 airsource-heatingpump.com

No9, Guangming North Road, Jiangyi, Leliu Town, Shunde District, Foshan City Guangdong Province, China