



Meidibao Air Source Heat Pump New Energy Household Heat Pump Electric Water Heater

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 3units
- Price:
- Packaging Details: Factory standards
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Name:
- Air Souce Heat Pump

China

CE

days T/T

IP×4

Meidibao

KFYRS-18II-M1

negotiate a price

20 units one day

Specific to the order based on regular

- Function: Heating And Cooling
- Heating Capacity:
- Material:
- Heat Exchanger:
- Waterproof Level:
- 20KW Galvanized Sheet Shell In Coil Or Tube In Tube

Our Product Introduction

Meidibao High Efficiency Air to Water Heat Pump Commercial Air Source Heat Pump

Product Description:

The Meidibao Air Source Heat Pump is a next-generation household water heating solution designed with energy efficiency and environmental sustainability in mind. By using renewable energy from the air, this electric water heater delivers reliable hot water for daily domestic use—while significantly reducing electricity consumption compared to traditional electric heaters.

Feature:


- 1. High Efficiency Performance
- 2. Eco-Friendly Refrigerant (R410A or R32 optional)
- 3. All-in-One Design
- 4. Low Operating Noise
- 5. Smart Control Options
- 6. Durable Construction

Specification:

| 20KW Direct heating heat pump | | |
|-------------------------------|-------|---------------|
| Model: | ĺ | KFYRS-18II-M1 |
| Power supply: | | 380V 3N /50Hz |
| Rated heating capacity: | kw | 20 |
| Rated power input: | kw | 5 |
| Rated current: | A | 8.83 |
| Max. power input: | kw | 6.5 |
| Max. current input: | A | 11.48 |
| Water heating capacity: | Ĺ/h | 429 |
| Refrigerant/charging volume: | | R410a/2600g |
| Max. exhaust pressure: | MPa | 3.0MPa |
| Min. suction pressure: | MPa | 0.05MPa |
| Rated hot water temp.: | | 55 |
| Max. hot water temp.: | | 60 |
| Water pipe size: | | DN25 |
| Noise level: | dB(A) | ≤65dB(A) |
| Anti-electric shock rate | | I |
| Protection grade: | | IP×4 |
| Dimensions: | mm | 750×690×1060 |
| Net weight: | kg | 150kg |

Advantages:

- 1.Energy Efficient
- 2.Eco-Friendly
- 3.Stable and Reliable
- 4.Quiet Operation
- 5.Safe and Convenient
- 6.Durable Construction 7.All-Season Functionality

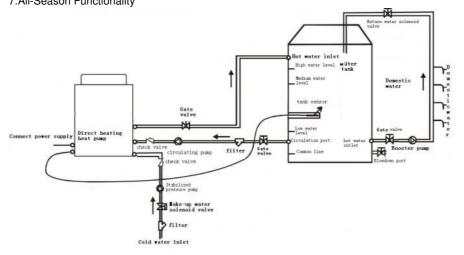



No9, Guangming North Road, Jiangyi, Leliu Town, Shunde District, Foshan City Guangdong Province, China