



Energy Saving Commercial Industrial Hot Water Heat Pump Stable Working Air Source Wholesale Air Water Heatpump

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Meidibao
- Certification: CE
- Model Number: KFYRS-18II-M1
- Minimum Order Quantity: 3units
- Price: negotiate a price
- Packaging Details: Factory standards
- Delivery Time: Specific to the order based on regular products 5 to 7 days. Custom made for 30 days
- Payment Terms: T/T
- Supply Ability: 20 units one day



Product Specification

- Name: Air Souce Heat Pump
- Function: Heating And Cooling
- Heating Capacity: 20KW
- Material: Galvanized Sheet
- Heat Exchanger: Shell In Coil Or Tube In Tube
- Waterproof Level: IP×4
- Highlight: **Industrial Hot Water Heat Pump,
Industrial Hot Water Heat Pump,
Commercial Heat Pump**

Product Description

Meidibao High Efficiency Air to Water Heat Pump Commercial Air Source Heat Pump

Product Description:

The Meidibao Energy Saving Commercial & Industrial Air Source Heat Pump is specially designed for large-scale hot water supply projects. Built with advanced technology, it ensures high efficiency, stable performance, and long-lasting durability. Ideal for hotels, schools, hospitals, factories, and office buildings, this system delivers consistent hot water while minimizing energy consumption.

Feature:


1. Energy Saving Performance
2. Stable Operation
3. Commercial-Grade Design
4. Low Noise Running
5. Smart Control Options
6. OEM & Wholesale Ready

Specification:

| 20KW Direct heating heat pump | | |
|-------------------------------|-------|---------------|
| Model: | | KFYRS-18II-M1 |
| Power supply: | | 380V 3N /50Hz |
| Rated heating capacity: | kw | 20 |
| Rated power input: | kw | 5 |
| Rated current: | A | 8.83 |
| Max. power input: | kw | 6.5 |
| Max. current input: | A | 11.48 |
| Water heating capacity: | L/h | 429 |
| Refrigerant/charging volume: | | R410a/2600g |
| Max. exhaust pressure: | MPa | 3.0MPa |
| Min. suction pressure: | MPa | 0.05MPa |
| Rated hot water temp.: | | 55 |
| Max. hot water temp.: | | 60 |
| Water pipe size: | | DN25 |
| Noise level: | dB(A) | ≤65dB(A) |
| Anti-electric shock rate | | I |
| Protection grade: | | IP×4 |
| Dimensions: | mm | 750×690×1060 |
| Net weight: | kg | 150kg |

Advantages:

1. High Energy Efficiency
2. Stable and Reliable Operation
3. Wide Application Range
4. Environmentally Friendly
5. Safe and Convenient
6. Durable Construction
7. Easy Installation and Maintenance

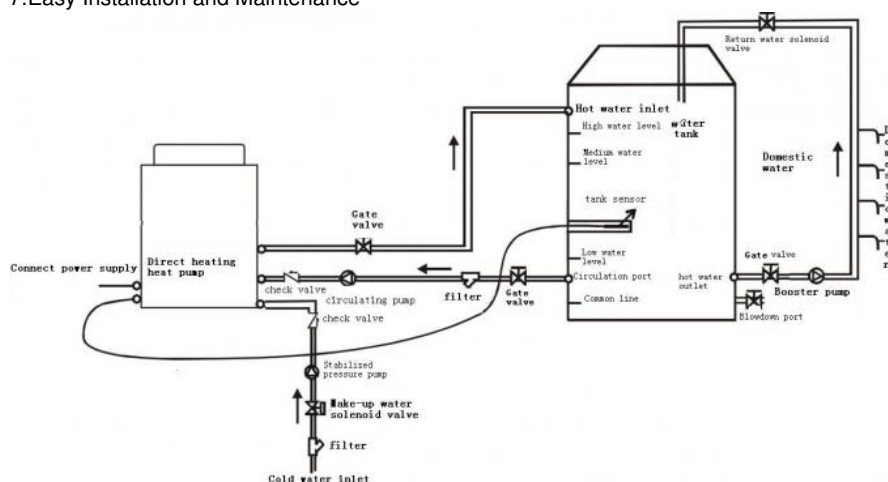



Meidibao® Foshan Meidi Bao Electric Appliance Industry Co., Ltd

☎ 8613534489875

✉ info@meidibao.com

🌐 airsource-heatingpump.com

