



Meidibao Energy Saving Commercial Industrial Hot Water Heat Pump Stable Working Air Source Wholesale Air Water Heatpump

Basic Information

Place of Origin: China
Brand Name: Meidibao
Certification: CE

Model Number: KFYRS-18II-M1

• Minimum Order Quantity: 3units

Price: negotiate a price Packaging Details: Factory standards

Delivery Time: Specific to the order based on regular

products 5 to 7 days. Custom made for 30

days

• Payment Terms: T/T

Supply Ability: 20 units one day



Product Specification

Name: Air Souce Heat PumpFunction: Heating And Cooling

Heating Capacity: 20KW

Material: Galvanized Sheet

• Heat Exchanger: Shell In Coil Or Tube In Tube

• Waterproof Level: IP×4

Product Description

Meidibao High Efficiency Air to Water Heat Pump Commercial Air Source Heat Pump

Product Description:

The Meidibao Energy Saving Commercial & Industrial Air Source Heat Pump is specially designed for large-scale hot water supply projects. Built with advanced technology, it ensures high efficiency, stable performance, and long-lasting durability. Ideal for hotels, schools, hospitals, factories, and office buildings, this system delivers consistent hot water while minimizing energy consumption.

Feature:


- 1. Energy Saving Performance
- 2. Stable Operation
- 3. Commercial-Grade Design
- 4. Low Noise Running
- 5. Smart Control Options
- 6. OEM & Wholesale Ready

Specification:

| OOK/M Divert heating heat moves | | |
|---------------------------------|-------------------------------|---------------|
| | 20KW Direct heating heat pump | |
| Model: | | KFYRS-18II-M1 |
| Power supply: | | 380V 3N /50Hz |
| Rated heating capacity: | kw | 20 |
| Rated power input: | kw | 5 |
| Rated current: | Α | 8.83 |
| Max. power input: | kw | 6.5 |
| Max. current input: | Α | 11.48 |
| Water heating capacity: | L/h | 429 |
| Refrigerant/charging volume: | | R410a/2600g |
| Max. exhaust pressure: | MPa | 3.0MPa |
| Min. suction pressure: | MPa | 0.05MPa |
| Rated hot water temp.: | | 55 |
| Max. hot water temp.: | | 60 |
| Water pipe size: | | DN25 |
| Noise level: | dB(A) | ≤65dB(A) |
| Anti-electric shock rate | | l l |
| Protection grade: | | IP×4 |
| Dimensions: | mm | 750×690×1060 |
| Net weight: | kg | 150kg |

Advantages:

- 1. High Energy Efficiency
- 2. Stable and Reliable Operation
- 3. Wide Application Range
- 4. Environmentally Friendly
- 5. Safe and Convenient
- 6. Durable Construction

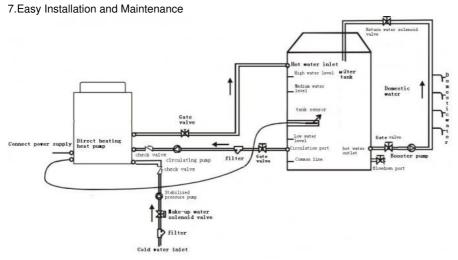





No9, Guangming North Road, Jiangyi, Leliu Town, Shunde District, Foshan City Guangdong Province, China