



3HP Commercial Air Source Heat Pump For Hot Water Instant To 60 Degrees

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:

• Supply Ability:

- Minimum Order Quantity: 5SET
- Price:
- Packaging Details: Factory standards
- Delivery Time: Specific to the order based on regular products 5 to 7 days. Custom made for 30 days
 Payment Terms: T/T

China

CE

Meidibao

M-D12AAH

negotiate a price

30 SET one day



Product Specification

| Colour: | White |
|--|---|
| • Use: | Hot Water |
| • COP: | 3.8~4.6 |
| Working Ambient Temperature: | 0~43C |
| • Туре: | Air Source |
| Service: | OEM |
| • Name: | Commercial Air Source Heat Pump |
| Highlight: | 3HP Commercial Air Source Heat Pump, Commercial Air Source Hot Water Heat Pump |

3HP Commercial Air Source Heat Pump for hot water instant to 60 degrees

Product Description:

Meidibao air source heat pump system is powered by ambient air and operates around the clock: it provides continuous hot water thrughout the yeat and throughout the year, regardless of weather . The opreating cost is 67% less than that of gas water heater, 75% less than that of electric water heater and 60% less than that of boiler. Intelligent control: The unit is automatically controlled by a microcomputer, and automatically runs according to the water temperature of the water tank and the user's water use, without the need for special duty. Reasonable arrangement of low front

Feature:

1. Compressor Choose the world famous brand rotary type or fully enclosed vortex compressor, low noise, low vibration, high efficiency, long service life . For units with multiple compressors inside, depending on the heat (cooling capacity), automatic unloading of the unit at partial load can be achieved to effectively save energy and at the same time avoid frequent start-up of the unit.

2. Water side heat exchanger The water side heat exchanger adopts high-efficiency shell tube heat exchanger or threaded casing heat exchanger, which has the characteristics of small volume, light weight, easy disassembly, convective heat conduction, high efficiency, and the maximum working pressure of 45kgf / cm2. The outside of the heat exchanger is insulated with 10mmPE to effectively prevent energy loss

3. Air side heat exchanger The air-side heat exchanger adopts an integral hydrophilic finned inner threaded tube design, with a large windward area, high heat transfer efficiency, resistance to oxidation and corrosion, and hydrophilic fins that are less prone to condensation and frosting, ensuring that the unit has sufficient heating capacity in the cold winter season, and that the unit can still operate normally for heating and defrosting even in low temperatures

4. Low noise fan he use of domestic famous brand motor, the use of axial impeller design, bearing is not easy to heat up, free of oil injection maintenance, blade more anti-aging, not deformed, the fan are strictly, static balance experiments, in order to obtain the best fan working point, fan efficiency and noise level.


5. Housing materials The external sheet metal is made of galvanised steel, and all sheet metal parts are pre-treated with rust removal, cleaning and drying, and then electrostatic spraying is used to paint the internal and external surfaces of each piece of sheet metal for a beautiful appearance

Specification:

| Model: | M-D12AAH |
|-------------------------------------|--------------------|
| Power supply: | 380V~415V/3PH/50Hz |
| Working temperature:(°C) | -5~43 |
| Min./Max hot water temperature:(°C) | 55/60 |
| Heating capacity output: | 11.5 kw |
| Hot water flow: | 2050L/h |
| Power input: | 3.2 kw |
| Rated current: | 6 |
| Compressor: | Scroll/Copeland |
| Refrigerant: | R417A |
| Weight: | 100kg |
| Dimension:(LxWxH) | 710*670*900mm |

Advantages:

Foshan Meidibao Electrical Appliance Co., Ltd. has been a manufacturer professionally specialized in research, development and production of Heat Pumps since 2005. Our well-equipped facilities and excellent quality control throughout all stages of production enables us to guarantee customer satisfaction

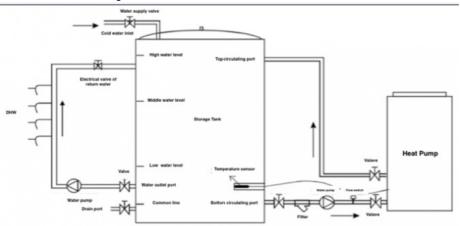



Meidibao[®] Foshan Meidi Bao Electric Appliance Industry Co., Ltd

♦ 8613534489875
♦ info@

info@meidibao.com info@meidibao.com

No9, Guangming North Road, Jiangyi, Leliu Town, Shunde District, Foshan City Guangdong Province, China